

L3
STKIC

Examen:
Calcul et Interfaçage,
EMD1

LALAOMI 1

EX1:

A - B \Rightarrow DEF6

- FA87

CF \rightarrow 1 E3EF

5 points

CF = 1 OF = 0

ZF = 0 PF = 0

SF = 1 AF = 1

EX2

Mov ax, x

Mov dx, 00

Mul Ax

mov bx, 05h

Mul bx

adc dx, 00h

mov bx, ax

mov ax, x

Mov cx, 04h

Mul cx

add ax, bx

mov bx, x

Mov cx, 04h

Sub bx, cx

div bx

Mov bx, 34d

Sub bx, ax

HLT

5 points

EX 3: MOV BL, 00h

MOV CL, 00h

ETIP: MOV AL, 02h

MUL BL

ADD AL, 01h

ADD CL, AL

INC BL

CMP BL, 04h

JB ETIP


MOV AL, CL

HLT

5 points

EX 4

EM4

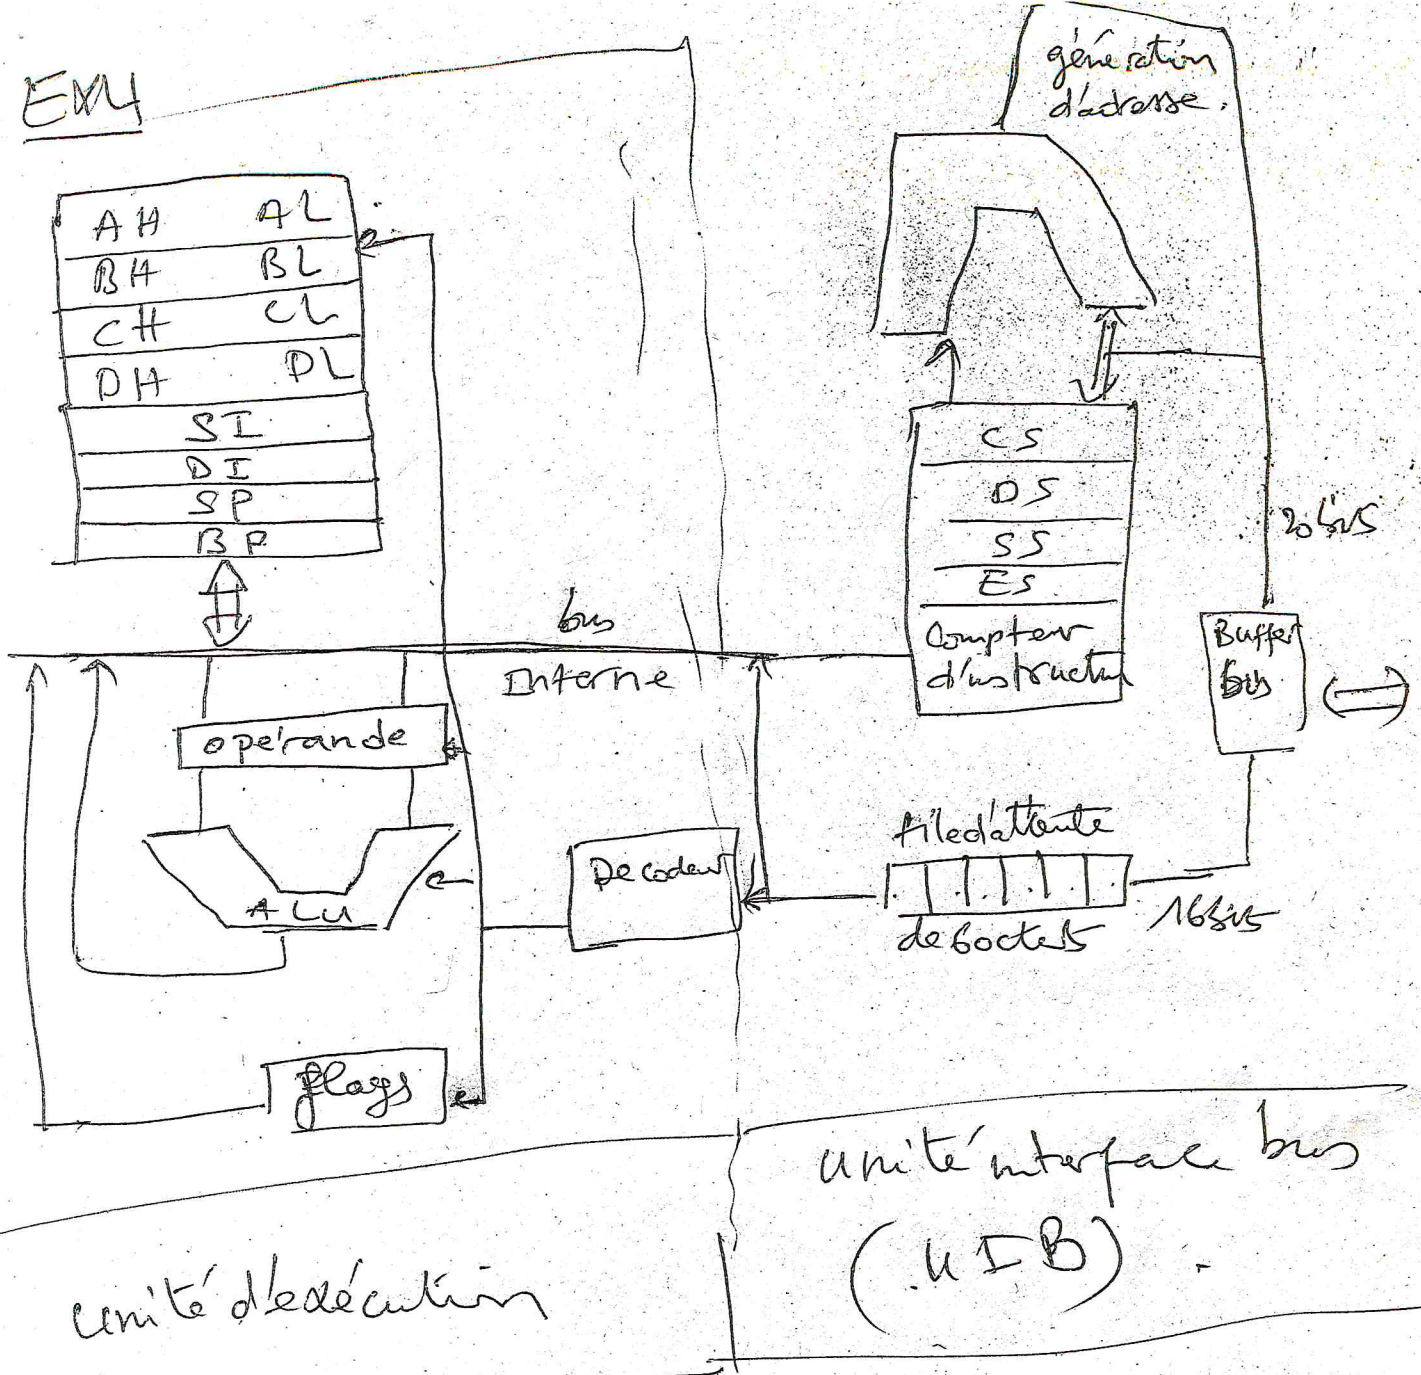

Rémi: l'explication pour le cours,
(5 points)